

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 May 2005 (06.05.2005)

PCT

(10) International Publication Number  
**WO 2005/040876 A1**

(51) International Patent Classification<sup>7</sup>: G02B 6/38

[CA/CA]; 1175, Ducharme, App. 101, Outremont, Québec  
H2V 1E2 (CA).

(21) International Application Number:  
PCT/CA2004/001855

(74) Agents: MANOLAKIS, Emmanuel et al.; Gowing  
Lafleur Henderson LLP, 1 Place Ville-Marie, 37th Floor,  
Montréal, Québec H3B 3P4 (CA).

(22) International Filing Date: 21 October 2004 (21.10.2004)

(25) Filing Language: English

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AB, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(26) Publication Language: English

(30) Priority Data:  
2,446,533 24 October 2003 (24.10.2003) CA

(71) Applicant (for all designated States except US):  
9134-9001 QUEBEC INC. [CA/CA]; 1, Place  
Ville-Marie, 37th Floor, Montréal, Québec H3B 3P4  
(CA).


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(72) Inventor; and

(75) Inventor/Applicant (for US only): WEYNANT, Eric

[Continued on next page]

(54) Title: FLEXIBLE FERRULE DEVICE FOR CONNECTION OF OPTICAL FIBER AND USE THEREOF

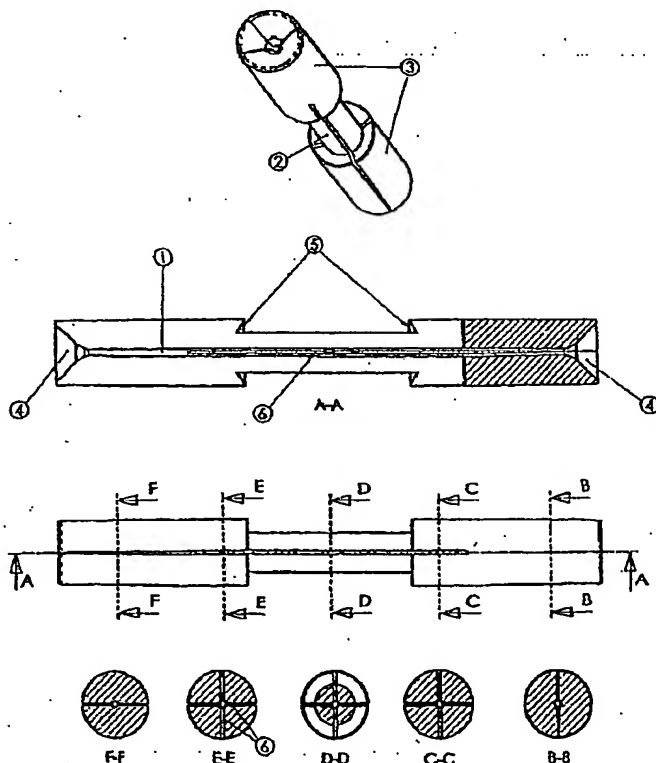

(57) Abstract: An optical female connector assembly for connecting optical fibers for use in optical communication systems. A method for connecting the optical fibers using the ferrule connector assembly and the use of a tool are also disclosed. The optical ferrule connector assembly maintains the two optical fibers in an end-to-end alignment, with a minimal air layer in between the ends, using clamps (3) and end cones (4), in order to allow the light signal to be transmitted from one optical fiber to the other optical fiber with the minimal attenuation and reflection losses. Furthermore, the optical ferrule connector assembly comprises longitudinal slots (6) to provide flexibility to the connector assembly, therefore, preventing the crushing of the optical fibers.

WO 2005/040876 A1

WO 2005/040876 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.